


Part: **41356, 41346, 41348, 41350, 41352**

Description: APR Salt Chlorinators

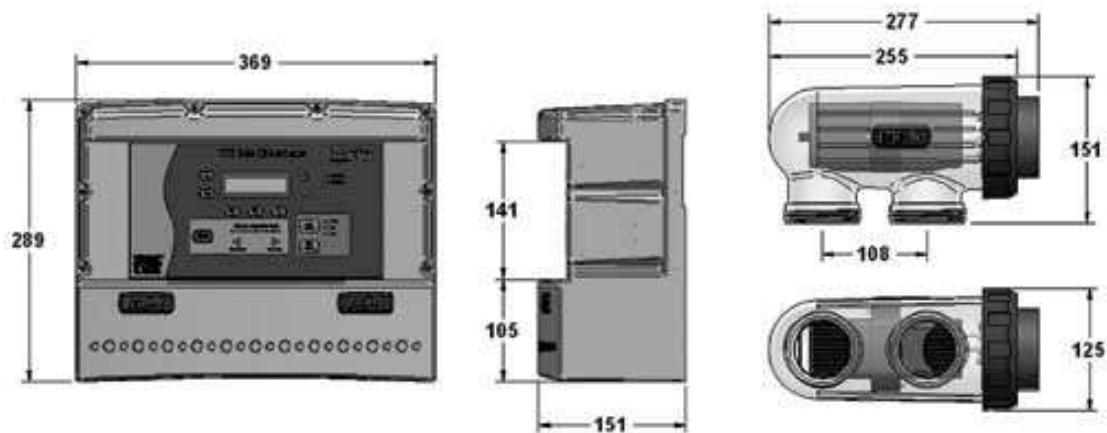

Part No	Desc	No. of Electrodes	Output	Pool Size – 13 deg	Pool Size – 18 deg
41356	APR 15S	7	15 g/h	50,000	30,000
41346	APR 25S	7	25 g/h	90,000	50,000
41348	APR 30S	9	30 g/h	120,000	75,000
41350	APR 40S	11	40 g/h	160,000	100,000
41352	APR 50S	13	50 g/h	200,000	120,000

Output Current	1	2	3	4	5	6	7	8
41356 (amps)	1.3	2.3	2.8	3.3	3.7	4.3	4.8	5.4
41346, 41348, 41350, 41352 (amps)	1.3	2.4	3.1	4.1	4.7	5.6	6.6	7.5

Model	41356	41346	41348	41350	41352
Transformer Voltage Input 230/240V 50hz	16.5	16.5	20.5	24.0	28.5

- Microprocessor controlled
- 8 levels of production output
- LED and LCD display of chlorine production
- Minimum flow rate of 100 lpm (6 m³/h) required
- Salinity range 2.5ppm (2.5g/l) up to 8.0ppm (8.0 g/l)
- Operating temperature range of 15°C - 40°C (59°F - 104°F)
- Internal cooling fan
- Control box manufactured from ABS, electrolytic cell manufactured from clear acrylic