




Decoración digital.

NEW

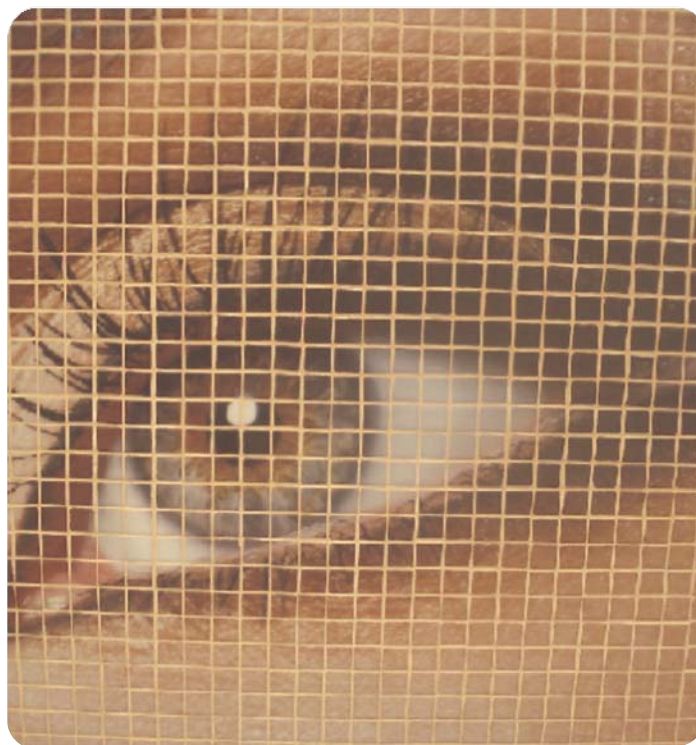

- Mosaico vítreo prensado y posteriormente cocido, **con decoración digital** y nula porosidad.
- Se puede realizar cualquier tipo de diseño gráfico, conservando todas las características del mosaico vítreo. Se necesita una fotografía a alta resolución, mínimo de 2 Mb por cada m² de impresión.
- Los desarrollos son personalizados y a medida del cliente.
- Sus diseños son preparados y tratados para resistir productos químicos, heladas, resistencia a las manchas, a la abrasión, a radiaciones solares y a cambios de temperatura.
- Por su inalterabilidad, fácil limpieza y colocación es ideal para revestir piscinas, centros wellness, decoración de interiores y de exteriores.

CARACTERÍSTICAS TÉCNICAS:

UNE-EN ISO	10545-3:1997	ABSORCIÓN DE AGUA	< 0,1%
	EN-101:1991	DUREZA AL RAYADO (Mosh)	5
UNE-ENV	12633:2003 Anexo A	RESISTENCIA AL DESLIZAMIENTO (Péndulo)	11
UNE-EN ISO	10545-9:1997	RESISTENCIA CHOQUE TÉRMICO	RESISTE
UNE-EN ISO	10545-12:1997	RESISTENCIA A LA HELADA	RESISTE
UNE-EN ISO	10545-14:1998	RESISTENCIA A LAS MANCHAS	CLASE 5 (Agua caliente)
UNE-EN ISO	10545-13:1998	RESISTENCIA QUÍMICA	RESISTE CLASE A

FORMATO NOMINAL:

	ESPESOR
25 x 25 mm	4,2 - 4,7 mm

ACABADOS:

FILM TRANSPARENTE

EMBALAJE:

	m ² /Box	m ² /Pallet	Box/Pallet	Kg/Box	Kg/Pallet
25 x 25 mm					
STANDARD	2	144	72	18	131

FLASH IMPRESIÓN PERSONALIZADA


Personalizamos su mosaico con la foto que usted desee.
Requisitos mínimos 2 Mb por m².

Consulte a su distribuidor.



Digital decoration

NEW

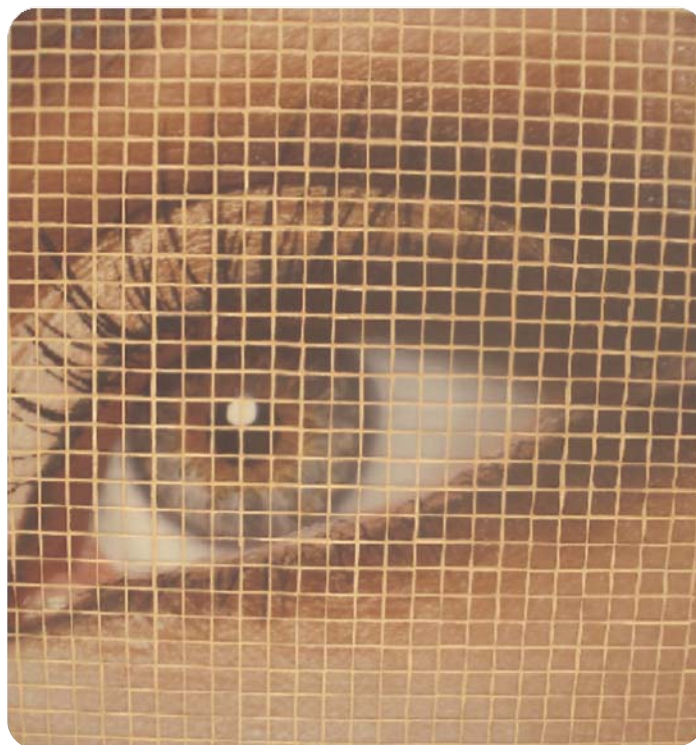

- Cut and coloured Glass, with **digital decoration**.
- Any kind of digital graphic design can be done, keeping all the vitreous mosaic characteristics. High resolution pictures are requested, with a minimum of 4MB for 2m².
- Any custom made pictures available based on customers requirements.
- Developed and design to resist, chemical products, frost, stain, and other hard weather conditions.
- Due to its unalterability, easy clean and installation its an optimum alternative to recover pools, wellness or outdoor-indoor decoration

TECHNICAL CHARACTERISTICS:

UNE-EN ISO	10545-3:1997	WATER ABSORTION	< 0,1%
	EN-101:1991	SCRATCH RESISTANCE (Mash)	5
UNE-ENV	12633:2003 Addendum A	SLIP RESISTANCE (Pendulum)	11
UNE-EN ISO	10545-9:1997	TERMICAL SHOCK RESISTANCE	RESISTS
UNE-EN ISO	10545-12:1997	FROST RESISTANCE	RESISTS
UNE-EN ISO	10545-14:1998	STAIN RESISTANCE	CLASS 5 (Hot water)
UNE-EN ISO	10545-13:1998	CHEMICAL RESISTANCE	CLASS A RESISTANCE

NOMINAL FORMAT:

	THICKNESS
25 x 25 mm	4,2 - 4,7 mm

FINISHED:

TRANSPARENT FILM

FLASH IMPRESSES CUSTOMIZED:

We customized your vitreous mosaic with the photograph that you wish. Minimum requirement 2Mb per m².

Check with your distributor.

PACKAGING:

	m ² /Box	m ² /Pallet	Box/Pallet	Kg/Box	Kg/Pallet
25 x 25 mm					
STANDARD	2	144	72	18	1316