




LumiPlus PAR56 DC Lamp

LumiPlus PAR56 DC lamps are the most efficient solution for replacing old PAR56 halogen or obsolete or inefficient LED lamps. The lamps are available in two power modes: V1 for private pools and V2 for public and hotel pools. For each power mode, there is a choice of cool white and white light. All models include a SELV power pack.



TECHNICAL SPECIFICATIONS


VOLTAGE:	24 V DC
Power pack included	V1: 16 W 24V DC V2: 40 W 24 V DC
FREQUENCY:	50/60 Hz
SERVICE LIFE:	L70-50.000h
MAX. WATER TEMPERATURE:	40°C
MAX. DEPTH. INSTALLATION:	2 m
MAXIMUM WATER TREATMENT VALUES:	Chlorine: 2 mg/l Bromine: 5 mg/l Salt chlorinator (NaCl): 6 g/l Pool water pH: 7.2 and 7.6
ACCESSORIES & COMPATIBLE NICHES:	Compatible with any PAR56 projector
MATERIALS:	Polyamide

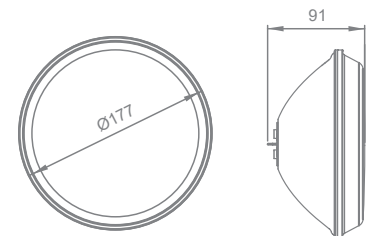

* measurements in mm.

LUMIPLUS PAR56	V1		V2	
	67515	67515WW	67516	67516WW
TYPE OF LIGHT	WHITE	WARM WHITE	WHITE	WARM WHITE
VOLTAGE	24 V DC	24 V DC	24 V DC	24 V DC
POWER	14 W	14 W	32 W	32 W
CONSUMPTION	14 VA	14 VA	32 VA	32 VA
LUMINOUS FLUX	1,485 lm	1,485 lm	4,320 lm	4,320 lm
COLOR TEMP.	5,700 K	3,000 K	5,700 K	3,000 K
CRI >	70	80	70	80
LUMINOUS EFFICIENCY	106	106	135	135
FLUX ANGLE	100°	100°	100°	100°
LENS	Wide	Wide	Wide	Wide
ENERGY CLASS <small>As per UE 2019/2015</small>				
INSTALLATION IN SALT WATER	Yes	Yes	Yes	Yes
COMPATIBLE CONTROL SYSTEMS	ON/OFF	ON/OFF	ON/OFF	ON/OFF

PHOTOMETRIC MEASUREMENTS

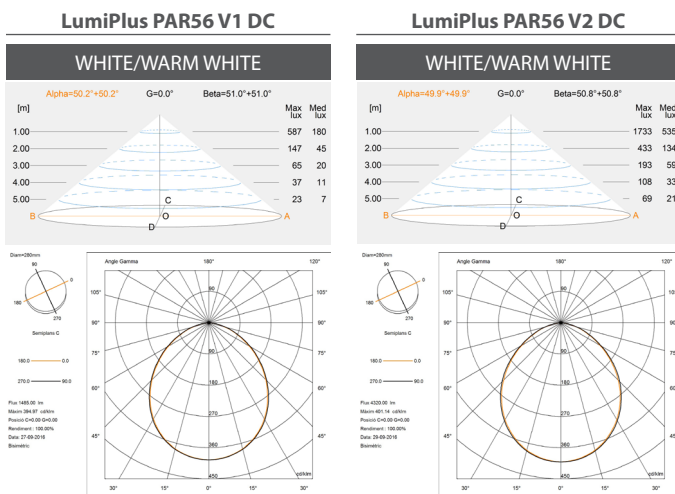

PACKAGING AND PALLETIZATION

Volume/Single box (m ³)	0.004
Weight/Single box (kg)	0.540
Units/Standard box	6
Volume/Standard box (m ³)	0.032
Weight/Standard box (kg)	4
Units/Pallet	72
Volume/Pallet (m ³)	2.304
Weight/Pallet (kg)	275

