




LumiPlus Micro projector for spas

The Micro LED projector is the smallest model in the range, ideal for lighting a spa. It is available in cool white, warm white and RGB multicolor light. The multicolor versions are compatible with the ECO, TOP, LumiPlus LED app, ModBUS (Connect) and DMX controllers (see codes). There is a choice between various types of faceplate: ABS or AISI 316 stainless steel. Fitted on a 1" 1/4 rear thread.







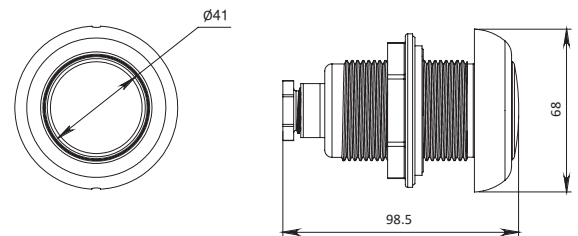





TECHNICAL SPECIFICATIONS

VOLTAGE:	12 V AC (24 V DC in DMX version)
FREQUENCY:	50/60 Hz
SERVICE LIFE:	L70-50,000 h
MAX. WATER TEMPERATURE:	40 °C
MAX. INSTALLATION DEPTH:	2 m.
MAXIMUM WATER TREATMENT VALUES:	Chlorine: 2 mg/l Bromine: 5 mg/l Salt chlorinator (NaCl): 6 g/l Pool water pH: 7.2 and 7.6
CABLE	2.5 m. H07RN-F 2 x 1.5mm ²
MATERIALS:	Polyamide body ABS/AISI 361 stainless steel faceplate




* measurements in mm.

	64554	64555	40765	40765WW	40766	40766WW	64559	64560
FACEPLATE MATERIAL	White ABS	AISI 316 stain-less steel	White ABS	White ABS	AISI 316 stain-less steel	White ABS	White ABS	AISI 316 stain-less steel
TYPE OF LIGHT	RGB 	RGB 	WHITE	WARM WHITE	WHITE	WARM WHITE	RGB DMX	RGB DMX
POWER	4 W	4 W	4 W	4 W	4 W	4 W	4 W	4 W
CONSUMPTION	7 VA	7 VA	6 VA	6 VA	6 VA	6 VA	4 VA	4 VA
LUMINOUS FLUX	186 lm	186 lm	315 lm	315 lm	315 lm	315 lm	186 lm	186 lm
VOLTAGE	12 V AC	12 V AC	12 V AC	12 V AC	12 V AC	12 V AC	24 V DC	24 V DC
COLOR TEMP.	-	-	5,700 K	3,000 K	5,700 K	3,000 K	-	-
CRI >	-	-	70	80	70	80	-	-
LUMINOUS EFFICIENCY	46.5 lm/W	46.5 lm/W	78.75 lm/W	78.75 lm/W	78.75 lm/W	78.75 lm/W	46.5 lm/W	46.5 lm/W
FLUX ANGLE	36°	36°	36°	36°	36°	36°	36°	36°
LENS	Wide	Wide	Wide	Wide	Wide	Wide	Wide	Wide
THERMAL PROTECTION	Flasher	Flasher	No	No	No	No	Self-regulation	Self-regulation
ENERGY CLASS <small>As per UE 2019/2015</small>								
INSTALLATION IN SALT WATER	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
COMPATIBLE CONTROL SYSTEMS	32458, 27818, 41988, 59131, 57434	32458, 27818, 41988, 59131, 57434	ON/OFF	ON/OFF	ON/OFF	ON/OFF	52142, 74099, 74100	52142, 74099, 74100

 Fluidra Connect compatible

PHOTOMETRIC MEASUREMENTS

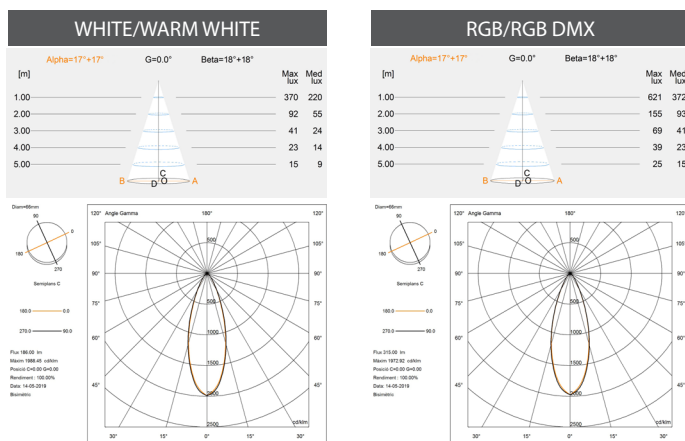

PACKAGING AND PALLETIZATION

Volume/Single box (m ³)	0.001
Weight/Single box (kg)	0.97
Units/Standard box	4
Volume/Standard box (m ³)	0.009
Weight/Standard box (kg)	4.7
Units/Pallet	119
Volume/Pallet (m ³)	1.440
Weight/Pallet (kg)	575

